



THE TOOLS DON'T MAKE THE INDIVIDUAL... BUT AN ARTEX SURE DOES HELP.

CUSTOM COLORS

Did you know we offer six standard colors: blue, green, red, white, black, and gray? We also offer a wide selection of speciality colors to choose from.

Custom paint jobs are some of our favorite projects to do, our spreaders can be painted to order per your unique specification.









CAN'T BEAT THE SPREAD

BUILT STRONG AND BUILT TO LAST OUR CUSTOMERS LIKE THE

VERSATILITY OF MATERIALS
THAT AN ARTEX CAN HANDLE

For proof of our spreaders' toughness, visit:

ARTEXMFG.COM/VIDEO-GALLERY



FARMERS DON'T SAY MUCH, UNLESS THEY'VE GOT SOMETHING REALLY IMPORTANT TO SAY.

"We've spread lime, manure/compost, and used as a silage wagon. Great machine. Built heavy, would recommend to anyone without hesitation." - STEVE YARICK, RICH HILL, MO (SB600 - Customer since 2021)

"Since we've owned Artex manure spreaders, managing manure went from being a chore to an asset on our farm. Artex's ability to break down the material is second to none which makes life a lot easier during spring planting." - BRANDON KERKHOFF, REDWOOD FALLS, MN (SBX800- Repeat Customer since 2021)

"Our SBX 800's are used for a slightly different purpose than most. We use them for spreading wood chips over orchards that have been removed and ground. These fields are EXTREMELY rough and these spreaders have proven they can handle tough conditions with flying colors. If we can't break them, nobody can!" - BRYCE IDEN, VISALIA, CA (SBX800 - Repeat Customer since 2021)

"We haul all types of cattle manure from frozen penpack to feedlot slurry. We also do commercial spreading. Our SB600 has never failed us and it has hauled thousands of loads. We've tried several other brands in the past, but nothing compares to an Artex for evenness of spread, reliability, and suspension. A quality unit."

- TOM FINNEGAN, AUSTIN, MN (SB600 - Repeat Customer since 2017)

To hear what other farmers have to say about their Artex, visit: ARTEXMFG.COM/TESTIMONIALS.



LED LIGHT PACKAGE



3' LED bar (shines in box) w/ 2 spot lights to see pattern when night spreading



AMERICAN FLAG DECALS



Decals are available upon request



FLOOR CHAIN PRESSURE RELIEF VALVE



1500-3000 PSI relief to bypass hydraulics on floor chain if obstruction occurs




SERIES/PARALLEL VALVE




Electronically switch from Parallel to Series mode for faster unload speeds

GRAIN ATTACHMENT



Funnels down to unload grain into an auger



Lifts up and out of the way for faster unloading of material





WHEN THE GOING GETS TOUGH, THE TOUGH DEPEND ON ARTEX.

Not all spreaders are created equal. The S350 is one of our most recent additions to the Artex lineup. With spring suspension, vertical beaters, and smaller size - the S series is hard to top in quality and price.






TWIN VERTICAL BEATERS



REMOTE GREASE BANKS




CHAIN FLOOR



SPRING SUSPENSION


5200

LENGTH 16'
WIDTH 5'
HEIGHT 3'
CAPACITY 320 CU. FT.
HORSEPOWER 90



5350

LENGTH 20'
WIDTH 5'
HEIGHT 3'
CAPACITY 400 CU. FT.
HORSEPOWER 100



FEATURES

- 1/4" THICK TUBE CONSTRUCTION ON REACH
- 3/8" THICK FLIGHTING ON VERTICAL BEATER
- SINGLE DRIVE MOTOR
- REMOVABLE REAR CHAIN DOOR
- 7 TOOTH REAR CHAIN DRIVE SPROCKET
- 1/2" HMW POLY FLOOR
- TIRE SIZE: 425, 560
- CHAIN REVERSING VALVE
- FLOOR SUPPORTS 12" ON CENTER
- 12.5 TON PER AXEL RATING (25,000 LBS)

SPECIALITY FEATURES



180 DEGREE SWIVEL ARM FOR HYDRAULIC LINES







STANDARD COLOR OPTIONS



Custom colors available upon request



I'D TAKE COWS MOOING OVER HORNS HONKING ANY DAY!

Some may call us artists, we may be inclined to agree because this spreader is a

SB550

LENGTH 20' WIDTH 5'6" HEIGHT 4'

CAPACITY 560 CU. FT.



SPECIALITY FEATURES



180
DEGREE
SWIVEL ARM FOR
HYDRAULIC LINES

INSET GUILLOTINE GATE



88C



TWIN VERTICAL BEATERS



REMOTE GREASE BANKS



CHAIN FLOOR




SPRING SUSPENSION

SB SERIES


SB300

LENGTH 14'
WIDTH 5'6"
HEIGHT 3'
CAPACITY 313 CU. FT.
HORSEPOWER 90



SB450

LENGTH 16'
WIDTH 5'6"
HEIGHT 4'
CAPACITY 448 CU. FT.
HORSEPOWER 100



SB500

LENGTH 18'
WIDTH 5'6"
HEIGHT 4'
CAPACITY 504 CU. FT.
HORSEPOWER 110



FEATURES

- 3/8" THICK TUBE CONSTRUCTION ON REACH
- 5/8" THICK FLIGHTING ON VERTICAL BEATER
- REMOVABLE REAR CHAIN DOORS
- 7 TOOTH REAR CHAIN DRIVE SPROCKET
- 1/2" HMW POLY FLOOR
- TIRE SIZES AVAILABLE 425, 560, 600
- CHAIN REVERSING VALVE
- FLOOR SUPPORTS 9" ON CENTER
- 12.5 TON PER AXEL RATING (25,000 LBS)

SB550

LENGTH 20'
WIDTH 5'6"
HEIGHT 4'
CAPACITY 560 CU. FT. HORSEPOWER 120



SB600

LENGTH 22'
WIDTH 5'6"
HEIGHT 4'
CAPACITY 616 CU. FT.
HORSEPOWER 150

SB700 TANDEM



SB700 TRIPLE



STANDARD COLOR OPTIONS



Custom colors available upon request



A R T E X Strand E X

ALMOST AS TOUGH AS FARMING.

Some folks like a wider load, and we're more than happy to accommodate. $\label{eq:commodate}$

Our SBX spreader series gives you an extra foot of width, making it easier and faster to fill. That's pretty big news for people with work to do, Artex has you covered.

SBX800

LENGTH 26 WIDTH 6'6" HEIGHT 4'

CAPACITY 858 CU. FT.



SPECIALITY FEATURES



180 DEGREE SWIVEL ARM FOR HYDRAULIC LINES

INSET GUILLOTINE GATE



88C FLOORCHRIN



TWIN VERTICAL BEATERS



REMOTE GREASE BANKS



CHAIN FLOOR



SPRING SUSPENSION

SBX SERIES

SBX500

LENGTH 16' WIDTH 6'6" HEIGHT 4' CAPACITY 528 CU. FT. HORSEPOWER 110



SBX550

LENGTH 18'
WIDTH 6'6"
HEIGHT 4'
CAPACITY 594 CU. FT.
HORSEPOWER 120



SBX600

LENGTH 20'
WIDTH 6'6"
HEIGHT 4'
CAPACITY 660 CU. FT.
HORSEPOWER 150




FEATURES

- 3/8" THICK TUBE CONSTRUCTION ON REACH
- 5/8" THICK FLIGHTING ON VERTICAL BEATER
- REMOVABLE REAR CHAIN DOORS
- 7 TOOTH REAR CHAIN DRIVE SPROCKET
- 1/2" HMW POLY FLOOR
- TIRE SIZES AVAILABLE 425, 560, 600
- CHAIN REVERSING VALVE
- FLOOR SUPPORTS 9" ON CENTER
- 12.5 TON PER AXEL RATING (25,000 LBS)


SBX700 TANDEM

LENGTH 22'
WIDTH 6'6"
HEIGHT 4'
CAPACITY 726 CU. FT.
HORSEPOWER 175

SBX700 TRIPLE



SBX800 TANDEM



SBX800 TRIPLE

LENGTH 26'
WIDTH 6'6"
HEIGHT 4'
CAPACITY 858 CU. FT.
HORSEPOWER 200



STANDARD COLOR OPTIONS



Custom colors available upon request





WELCOME TO THE BIG LEAGUES.

Now offering a bigger, badder spreader in our low-profile series for those with lots of work and not a lot of time. With a low load height and an extra 4 feet of length for more volume, the SBX950 helps you get the job done smarter, not harder.



SPECIALITY FEATURES



180 DEGREE SWIVEL ARM FOR HYDRAULIC LINES

INSET GUILLOTINE GATE



88C FLOORCHRIN



TWIN VERTICAL BEATERS



REMOTE GREASE BANKS




CHAIN FLOOR



SPRING SUSPENSION

SBX950 TRIPLE



STANDARD COLOR OPTIONS



Custom colors available upon request

FEATURES

- 3/8" THICK TUBE CONSTRUCTION ON REACH
- 5/8" THICK FLIGHTING ON VERTICAL BEATER
- REMOVABLE REAR CHAIN DOORS
- 7 TOOTH REAR CHAIN DRIVE SPROCKET
- 1/2" HMW POLY FLOOR
- TIRE SIZES AVAILABLE 425, 560, 600
- CHAIN REVERSING VALVE
- FLOOR SUPPORTS 9" ON CENTER
- AIR OR HYDRAULIC BRAKES
- 12.5 TON PER AXEL RATING (25,000 LBS)





THE MORE **LUCK I SEEM** TO HAVE.

You never know what you're gonna face on the farm. Good thing is, this heaviest-of-duties pull-type spreader manages all types of solid manure and adapts to just about any spread material you can imagine. So whatever life throws at you, you can blow it to smithereens.



SPECIALITY FEATURES



ARTICULATING



TWIN VERTICAL BEATERS



REMOTE GREASE BANKS



CHAIN FLOOR



SUSPENSION

CB SERIES

CB700

LENGTH 20'
WIDTH 7'6"
HEIGHT 4'
CAPACITY 750 CU. FT.
HORSEPOWER 150



CB800

LENGTH 22'
WIDTH 7'6"
HEIGHT 4'
CAPACITY 825 CU. FT.
HORSEPOWER 180



CB900

LENGTH 24'
WIDTH 7'6"
HEIGHT 4'
CAPACITY 900

CAPACITY 900 CU. FT. HORSEPOWER 200



CB1000

LENGTH 26'
WIDTH 7'6"
HEIGHT 4'
CAPACITY 1000 CU. FT.
HORSEPOWER 225

LENGTH 30' WIDTH 7'6" HEIGHT 4'

CAPACITY 1125 CU. FT. HORSEPOWER 250

STANDARD COLOR OPTIONS



Custom colors available upon request

FEATURES

- 1/2" THICK TUBE CONSTRUCTION ON REACH
- 5/8" THICK FLIGHTING ON VERTICAL BEATER
- REMOVABLE REAR CHAIN DOORS
- 7 TOOTH REAR CHAIN DRIVE SPROCKET
- 1/2" HMW POLY FLOOR
- TIRE SIZES AVAILABLE 600, 750
- CHAIN REVERSING VALVE

- FLOOR SUPPORTS 9" ON CENTER
- 15 TON PER AXEL RATING (30,000 LBS)
- UNDERCARRIAGE COMES STANDARD WITH HYDRAULIC BRAKES
- UNDERCARRIAGE EQUIPPED WITH SELF-STEER TECHNOLOGY
- AIR OR HYDRAULIC BRAKES





NEARLY FANCY ENOUGH TO DRIVE TO CHURCH ON SUNDAYS.

This mobile monster offers a lot of great features, but perhaps the best is its attachment versatility. It was designed so that all Artex attachments mount onto the rear, utilizing your investment as much as possible and enabling equipment changes in about an hour. Praise be.



SPECIALITY FEATURES

10 GAUGE STEEL WALLS

CLOSED LOOP HYDRAULIC SYSTEM

INSET GUILLOTINE GATE

88C

CB2004

LENGTH 20' WIDTH 7'6" HEIGHT 4' CAPACITY 760 CU. FT.



TWIN VERTICAL BEATERS



REMOTE GREASE BANKS



CHAIN FLOOR



HYDRAULIC MANIFOLD KIT

CB TRUCK SERIES


CB1804

LENGTH 18'
WIDTH 7'6"
HEIGHT 4'
CAPACITY 684 CU. FT.


CAPACITY 760 CU. FT.



CB2004 LENGTH 20' WIDTH 7'6" HEIGHT 4'

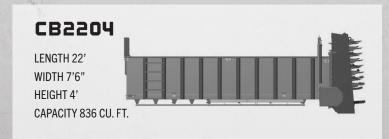

LENGTH 24' WIDTH 7'6" HEIGHT 4' CAPACITY 912 CU. FT.

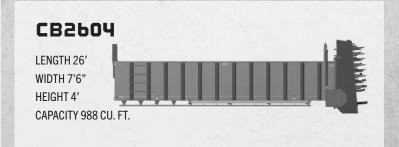

Box mounting offered through our factory on customer provided chassis excluding cab controls and PTO installation

STANDARD COLOR OPTIONS



Custom colors available upon request

FEATURES

- 5/8" THICK FLIGHTING ON VERTICAL BEATER
- REMOVABLE REAR CHAIN DOORS
- 7 TOOTH REAR CHAIN DRIVE SPROCKET
- 1/2" HMW POLY FLOOR
- CHAIN REVERSING VALVE
- FLOOR SUPPORTS 9" ON CENTER
- 2' FRONT BULKHEAD





OUR VERSION OF A CONVERTIBLE.

Spread manure, compost, paper waste, bio-solids, poultry

litter, and more. It doesn't really matter, because this spreader has proven it can stand up to whatever your chores require. Even hauling silage. Just remove the beaters and

drop in the tailgate.







SPECIALITY FEATURES

10 GAUGE STEEL WALLS

INSET GUILLOTINE GATE ALL ELECTRONIC CONTROLS

88C FLOORCHRIN

CT3605

LENGTH 36' WIDTH 7'6" HEIGHT 4' CAPACITY 1360 CU. FT.



TWIN VERTICAL BEATERS



REMOTE GREASE BANKS



CHAIN FLOOR

FEATURES

- REMOVABLE REAR CHAIN DOORS
- 7 TOOTH REAR CHAIN DRIVE SPROCKET
- 1/2" HMW POLY FLOOR
- FLOOR SUPPORTS 9" ON CENTER
- TIRE SIZES AVAILABLE 11R22.5, 11R24.5
- 12.5 TON PER AXEL RATING (25,000 LBS)

CT SERIES

CT3004

LENGTH 30' HEIGHT 4'
WIDTH 7'6" CAPACITY 1140 CU. FT.



CT3204

LENGTH 32' HEIGHT 4'
WIDTH 7'6" CAPACITY 1210 CU. FT.



CT3404

LENGTH 34' HEIGHT 4'

WIDTH 7'6" CAPACITY 1290 CU. FT.



STANDARD COLOR OPTIONS



Custom colors available upon request

LENGTH 36' HEIGHT 4' WIDTH 7'6" CAPACITY 1360 CU. FT.





ALL MODELS ALSO AVAILABLE WITH A 5' WALL





DRINK SOME COFFEE, PUT YOUR BOOTS ON AND GET THE JOB DONE.

Struggling with not having enough hours in the day? Our trailers are built to save you hours with a fast unloading time. Especially when they're hand-built to handle the brutal demands of life on the farm.

TR3806-8

LENGTH 38' WIDTH 8' HEIGHT 6'

CAPACITY 2128 CU. FT.




SPECIALITY FEATURES




88C FLOORCHAIN




TR SERIES

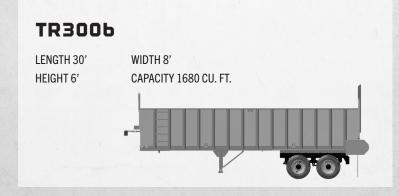

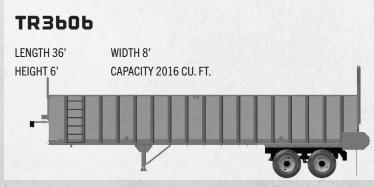



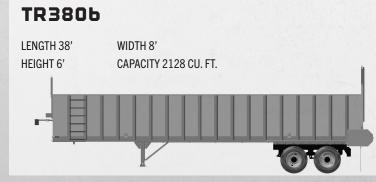

LENGTH 34' WIDTH 8' HEIGHT 6' CAPACITY 1904 CU. FT.




ALL MODELS ALSO AVAILABLE WITH A 5' WALL

FEATURES

- REMOVABLE REAR CHAIN DOORS
- 7 TOOTH REAR CHAIN DRIVE SPROCKET
- 1/2" HMW POLY FLOOR
- FLOOR SUPPORTS 9" ON CENTER
- TIRE SIZES AVAILABLE 11R22.5, 11R24.5
- 12.5 TON PER AXEL RATING (25,000 LBS)

COLOR OPTIONS



Custom colors available upon request



A FARM IS MORE THAN LAND AND CROPS; IT'S A FAMILY HERITAGE AND FUTURE.

Drop this box on the back of a truck and cut your silage processing time to shreds.

It's easy to load in the field, it unloads in a flash, and it stands up to

TB2205

LENGTH 22'
WIDTH 8'
HEIGHT 5'
CAPACITY 1541 CU. FT.



SPECIALITY FEATURES




88C FLOORCHAIN FULL REAR MUD FLAPS

TB SERIES

TB200b

LENGTH 20'
WIDTH 8'
HEIGHT 6'
CAPACITY 1620 CU. FT.




TB2206

LENGTH 22'
WIDTH 8'
HEIGHT 6'
CAPACITY 1783 CU. FT.



TB240b

LENGTH 24'
WIDTH 8'
HEIGHT 6'
CAPACITY 1946 CU. FT.



TB2606

LENGTH 26'
WIDTH 8'
HEIGHT 6'
CAPACITY 2109 CU. FT.



FEATURES


- REMOVABLE REAR CHAIN DOORS
- 7 TOOTH REAR CHAIN DRIVE SPROCKET
- 1/2" HMW POLY FLOOR
- FLOOR SUPPORTS 9" ON CENTER
- TIRE SIZES AVAILABLE 11R22.5, 11R24.5

STANDARD COLOR OPTIONS



Custom colors available upon request









WE'RE IN THE BUSINESS OF MAKING THINGS EASIER FOR YOU

Not only do we offer an impressive lineup of spreaders, we also have other equipment that will be beneficial to your operation. Just hook it up to your tractor and get working, you'll notice the time you save. And that other project you didn't





ANTI-FALL CYLINDER




ADJUSTABLE HITCH LADDER



COUNTER WEIGHT BRACKETS

SHD1100

LENGTH 15' WIDTH 12' HEIGHT 13' CAPACITY 600 CU. FT. HORSEPOWER 200



SPECIALITY FEATURES








STANDARD COLOR OPTIONS



Custom colors available upon request







Model	SHD1100	3HD1100						
A - Overall Length	311"	Loading Height	111"	Box Construction - Thickness	10 Ga	Distance to Trailer Clearance		
B - Inside Box Length	180"	Capacity		Height Clearance		Min	8"	
C - Overall Height	156"	Cubic Feet	600	Min	129"	F - Max	32"	
D- Overall Width	147"	Cubic Yards	23	E - Max	197"			



- 3/8" THICK TUBE CONSTRUCTION ON REACH
- TIRE SIZE: 750
- SOLID BOTTOM WITH DRAINS
- COUNTER WEIGHT BRACKETS WEIGHTS AND HARDWARE ARE NOT INCLUDED
- ADJUSTABLE HITCH LADDER
- VARIABLE HEIGHT OFF LOAD
- 30 TON UNDERCARRIAGE (TANDEM)
- OPTIONAL EXTENSIONS AVAILABLE: HIGH CAPACITY 1,062 CU. FT.
- 12.5 TON PER AXEL RATING (25,000 LBS)



SHE'LL LOOK MIGHTY PRETTY IN THE FIELD

Keep the picture, it'll last longer. Or better yet, get yourself one and you can stare at all you want.





MANUAL LIFT GRAIN DOOR



STEERABLE AXLES



HYDRAULIC LIFT REAR TAILGATE



FRONT FOLD DOWN
PANEL

SED1200

LENGTH 24'
WIDTH 8'
HEIGHT 5'
CAPACITY 960 CU. FT.
HORSEPOWER 200



SPECIALITY FEATURES



STANDARD COLOR OPTIONS



Custom colors available upon request



Model	SED1200	SED1200					
A - Overall Length	366"	Capacity					
B - Inside Box Length	288"	Cubic Feet	960				
C - Overall Height	124"	Cubic Yards	35				
D - Overall Width	127"	Box Construction - Thickness	10 Ga				
Loading Height	124"						

FEATURES

- 3/8" THICK TUBE CONSTRUCTION ON REACH
- 3/16" THICK STEEL FLOOR
- TIRE SIZE: 750
- WALL TO FLOOR SHEDDERS
- 5 STAGE SINGLE ACTING TELESCOPIC CYLINDER
- LOCK-OUT STANDS ON BOTH SIDES
- 30 TON UNDERCARRIAGE (TANDEM)
- UNDERCARRIAGE COMES STANDARD WITH HYDRAULIC BRAKES
- UNDERCARRIAGE EQUIPPED WITH SELF-STEER TECHNOLOGY
- AIR OR HYDRAULIC BRAKES
- 15 TON PER AXEL RATING (30,000 LBS)








YOUR FARM JUST GOT ITS FIRST FLOATATION DEVICE.

No you're not dreaming, you're looking at Trax on an Artex! We're talking lower pounds per square inch and a wider track width, creating better floatation and less compaction giving plant roots a better shot at growth.




SPECIALITY FEATURES



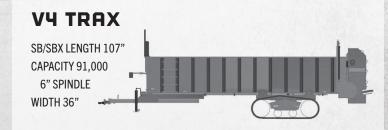









REAP THE WHIRLWIND!

SPECIFICALLY DESIGNED FOR POULTRY LITTER.

Add the Cyclone to the back of any model spreader, and poultry litter is no longer a problem. It takes light, low-moisture materials and spreads them consistently as wide as 60 feet. But that's not all. Optimize your nutrient application by pairing the Cyclone with our Raven variable rate system.



UP TO **60'** SPREAD POULTRY LITTER

TWIN
HORIZONTAL
BEATERS

ADJUSTABLE PADDLES AND REAR GATE



TECHNOLOGY

Work with Artex and Raven, and you'll know exactly what you're spreading.

Control your target spreading rate with the most innovative and easiest to use equipment, simply by entering it into the keypad. Then let our automated system take care of the rest.

FEATURES

- Fully automated spreader control makes spreading less work
- Constant monitoring gives you feedback on
 - Ground speed
 - Floor chain speed
 - Application rate
 - Total/partial area
 - Total/partial weight
 - Live weight in the spreader
- ISO setup; if tractor is ISO equipped with a VT, simply plug in the IBBC and it can run on the existing display

- · Records to task controller
- Spreader automatically adjusts to variations using dynamic calibration

0 \\///(1b/ac)

Information can be downloaded to a USB stick

 Application rate is automatically maintained by varying the unloading rate in proportion to ground speed

0.0 %

- Quick-start function to prime the spreader
- CR7 can be used as a 2nd display for viewing

RAVEN



RAVEN

15000

o.o 🖔

RAVEN

1 2 3

个



BUILT RELIABLE WITH YOU IN MIND

We build trailers for your rendering needs; trailers built with pride to last for years of dependable service.











CUSTOM FEATURES

- Extruded Hollow Wall Construction
- Spring or Air Suspension
- Heavy Duty Hydraulics
- Leak Proof Gates
- Two Point Controls
- Compartments for Material Separation
- 2 & 3 25,000lb Axles










MODEL SPECIFICATIONS





A B




SB SERIES

Model	S200	S350	SB300	450	500	550	600	700	700 Triple
A - Overall Length	291.5"	341"	263"	286"	311"	334"	360"	405"	405"
B - Inside Box Length	192"	240"	168"	192"	216"	239"	264"	312"	312"
Inside Box Length with Guillotine Gate	175"	222"	151"	174"	198"	222"	247"	294"	294"
C - Overall Height	113"	113"	114"	133"	133"	133"	133"	136"	114"
D - Overall Width	120"	120"	125"	125"	125"	125"	125"	125"	125"
Loading Height	75"	75"	75"	87"	87"	87"	87"	87"	87"
Specifications									
Unit Weight - Empty	7500	8500	9450	11420	12024	12578	12440	14140	15640
Capacity									
Cubic Feet Struck	240	300	308	352	396	440	484	572	572
Cubic Yards Heaped	9.8	14.8	14	16	18	20	22	26	26
Augers									
Diameter	31.2"	31.2"	34.5"	34.5"	34.5"	34.5"	34.5"	34.5"	34.5"
Flighting Thickness	10 mm	10 mm	15 mm						
Tube Diameter	5.3"	5.3"	6"	6"	6"	6"	6"	6"	6"
Drive Shaft Diameter	1 3/4"	1 3/4"	1 3/4"	1 3/4"	1 3/4"	1 3/4"	1 3/4"	1 3/4"	1 3/4"
Shear Paddles	Yes								
PT0	1 3/8" or 1 3/4"	1 3/8" or 1 3/4"							
RPM	CV-1000								
PTO Protection Shear Bolt	Yes								
Box Construction - Thickness	12Ga	12Ga	10Ga						
Axle Type - Single/Tandem/ Triple	Single	Tandem	Single	Tandem	Tandem	Tandem	Tandem	Tandem	Triple
Brakes	Optional								

SBX SERIES


Model	SBX500	550	600	700	700 Triple	800	800 Triple	950
A - Overall Length	292"	315"	338"	363"	363"	408"	408"	467"
B - Inside Box Length	193"	216"	240"	264"	264"	312"	312"	360"
Inside Box Length with Guillotine Gate	175"	199"	222"	247"	247"	294"	294"	336"
C - Overall Height	133"	133"	133"	136"	114"	136"	114"	114"
D - Overall Width	138"	138"	138"	138"	138"	138"	138"	138"
Loading Height	87"	87"	87"	87"	87"	87"	87"	89"
Specifications								
Unit Weight - Empty	12975	13040	13275	13760	15260	15400	16900	17,200
Capacity								
Cubic Feet Struck	416	468	520	572	572	676	676	780
Cubic Yards Heaped	19	22	24	27	27	31	31	36
Augers								-
Diameter	38.75"	38.75"	38.75"	38.75"	38.75"	38.75"	38.75"	38.75"
Flighting Thickness	15 mm							
Tube Diameter	6"	6"	6"	6"	6"	6"	6"	6"
Shear Paddles	Yes							
PTO	1 3/8" or 1 3/4"							
RPM	CV-1000							
PTO Protection Shear Bolt	Yes							
Box Construction - Thickness	10Ga							
Axle Type - Single/Tandem/ Triple	Tandem	Tandem	Tandem	Tandem	Triple	Tandem	Triple	Triple
Brakes	Optional	Standard						





CB SERIES

Model	CB700	800	900	1000	1200
A - Overall Length	353"	369"	393"	418"	468"
B - Inside Box Length	241"	264"	288"	312"	360"
Inside Box Length with Guillotine Gate	223"	247"	271"	295"	343"
C - Overall Height	149"	149"	149"	149"	149"
D - Overall Width	116"	116"	116"	116"	116"
Loading Height	118"	118"	118"	118"	118"
					4
Specifications					
Unit Weight - Empty				23270	27080
Capacity					
Cubic Feet Heaped	753	825	900	975	1125
Cubic Yards Heaped	28	31	33	36	42
Augers					
Diameter	42"	42"	42"	42"	42"
Flighting Thickness	15 mm				
Tube Diameter	6"	6"	6"	6"	6"
Shear Paddles	Yes	Yes	Yes	Yes	Yes
PTO	1 3/4"	1 3/4"	1 3/4"	1 3/4"	1 3/4"
RPM	CV-1000	CV-1000	CV-1000	CV-1000	CV-1000
PTO Protection Shear Bolt	Yes	Yes	Yes	Yes	Yes
Box Construction - Thickness	10 Ga				
Axle Type - Single/Tandem/ Triple	Tandem	Tandem	Tandem	Tandem	Triple
Brakes	Standard	Standard	Standard	Standard	Standard




TB SERIES

Model	TB2005-6	2205-6	2405-6	2605-6
A - Overall Length	258"	282"	306"	330"
B - Inside Box Length	238.5"	262.5"	286.5"	310.5"
C - Overall Height	118"	118"	118"	118"
D - Overall Width	102"	102"	102"	102"
Wall Height	76.5"/88.5"	76.5"/88.5"	76.5"/88.5"	76.5"/88.5"
Specifications				442
Capacity				
Cubic Feet Heaped	1400/1620	1541/1783	1682/1946	1823/2109
Cubic Yards Heaped	52/60	57/66	66/62	68/78
Box Construction - 12 Ga Thickness		12 Ga	12 Ga	12 Ga




MODEL SPECIFICATIONS





CB TRUCK

Model	CB1804	2004	2204	2404	2604
A - Overall Length	260"	284"	308"	332"	357"
B - Inside Box Length	217"	241"	265"	289"	313"
Inside Box Length with Guillotine Gate	199"	95"	247"	271"	295"
C - Overall Height	48"	48"	48"	48"	48"
D - Overall Width	102"	102"	102"	102"	102"
Specifications					
Capacity					
Cubic Feet Heaped	684	760	836	912	988
Cubic Yards Heaped	25	28	31	34	37
Augers					
Diameter	42"	42"	42"	42"	42"
Flighting Thickness	15 mm				
Tube Diameter	6"	6"	6"	6"	6"
Shear Paddles	Yes	Yes	Yes	Yes	Yes
PTO Protection Shear Bolt	Yes	Yes	Yes	Yes	Yes
Box Construction - Thickness	10Ga	10Ga	10Ga	10Ga	10Ga
Brakes	Standard	Standard	Standard	Standard	Standard






CT SERIES

Model	CT3004	3204	3404	3604	3804	4004
A - Overall Length	404"	428"	452"	475"	500"	524"
B - Inside Box Length	361"	385"	409"	433"	456"	481"
Inside Box Length with Guillotine Gate	343"	367"	391"	415"	438"	462"
C - Overall Height	134"	134"	134"	134"	134"	134"
D - Overall Width	102"	102"	102"	102"	102"	102"
Loading Height	104"	104"	104"	104"	104"	104"
Specifications		2-11 No. 14				
Capacity						
Cubic Feet Heaped	1140	1210	1290	1360	1400	1520
Cubic Yards Heaped	42	45	48	50	52	56
Augers						
Diameter	42"	42"	42"	42"	42"	42"
Flighting Thickness	15 mm	15 mm	15 mm	15 mm	15 mm	15 mm
Tube Diameter	6"	6"	6"	6"	6"	6"
Shear Paddles	Yes	Yes	Yes	Yes	Yes	Yes
PTO Protection Shear Bolt	Yes	Yes	Yes	Yes	Yes	Yes
Box Construction - Thickness	10Ga	10Ga	10Ga	10Ga	10Ga	10Ga
Axle Type - Single/Tandem/ Triple	Tandem	Tandem	Tandem	Tandem	Tandem	Tandem
Brakes	Standard	Standard	Standard	Standard	Standard	Standard

NOTES





TR SERIES

Model	TR3006-8	3206-8	3406-8	3606-8	3806-8	4006-8
A - Overall Length	375"	399"	432"	447"	471"	495"
B - Inside Box Length	358"	381"	406"	430"	454"	478"
C - Overall Height	158"	158"	158"	158"	158"	158"
D - Overall Width	102"	102"	102"	102"	102"	102"
Loading Height	128"	128"	87"	128"	128"	128"
Specifications						
Capacity						
Cubic Feet Heaped	1680	1792	1904	2016	2128	2240
Cubic Yards Heaped	62	66	71	75	79	83
Box Construction - Thickness	12 Ga					
Axle Type - Single/Tandem/ Triple	Tandem	Tandem	Tandem	Tandem	Tandem	Tandem
Brakes	Optional	Optional	Optional	Optional	Optional	Optional

The state of the second of the	
	The state of the s
1	and the second
* *	
JA.	



WE DON'T STOP UNTIL WE'RE PROUD!

IS IT A CALLING? ARE WE DESTINED TO BUILD THE TOUGHEST SPREADERS IN THE WORLD? WE THINK SO, YES, AND THAT'S WHY WE TAKE OUR WORK SO SERIOUSLY.

JUST LIKE THE FARMERS WE WORK FOR.



GIVE US A CALL. TAKE A PEEK AT OUR WEBSITE.

OR, BETTER YET, TALK TO SOMEONE WHO OWNS ONE.

WWW.ARTEXMFG.COM | 888-644-2893



