



ARTEX

ALMOST AS TOUGH AS FARMING.



WWW.ARTEXMFG.COM

THE TOOLS DON'T MAKE THE INDIVIDUAL...
BUT AN ARTEX SURE DOES HELP.

CUSTOM COLORS

Did you know we offer six standard colors: blue, green, red, white, black, and gray? We also offer a wide selection of specialty colors to choose from. Custom paint jobs are some of our favorite projects to do, our spreaders can be painted to order per your unique specification. Custom decals are not available.

WWW.ARTEXMFG.COM




Hentzen Liquid Colors


RAL 4002	Flag Red	RAL 3020	RAL 3015	RAL 2012	RAL 2010
PMS 195C	52 Red	RAL 3000	RAL 3014	RAL 2009	RAL 2011
PMS 188C	CNH Ag Red	RAL 3001	RAL 3017	Omaha Orange	CNH Power Tan
RAL 3009	RAL 3011	RAL 3031	RAL 3018	RAL 2001	RAL 1006
Maroon	RAL 3003	RAL 3002	RAL 3016	Orange	RAL 1003
RAL 3005	Vivid Red	RAL 3013	RAL 3012	12197 International Orange	RAL 1004
RAL 5024	RAL 5019	RAL 5014	RAL 4009	RAL 1015	RAL 8001
RAL 5012	Royal Blue	RAL 5023	RAL 4005	RAL 1014	RAL 7008
RAL 5015	Post Office Blue	RAL 5000	RAL 4001	RAL 1002	RAL 8002
CNH NH Blue	RAL 5013	RAL 7026	RAL 1000	RAL 1001	RAL 8008
RAL 5017	RAL 5022	Blue Gray	RAL 7034	RAL 1019	RAL 8028
RAL 5005	RAL 5004	RAL 5008	RAL 1011	Smoke	RAL 6014

RAL 1017	Pale Yellow	RAL 6011	Waste Management Green	RAL 6000	RAL 6027
CNH Bright Yellow	RAL 1012	RAL 6025	RAL 6003	RAL 6005	RAL 5018
Signal Yellow	RAL 1032	RAL 6010	RAL 6020	RAL 6012	RAL 5021
Ag Yellow	RAL 1024	Ag Green	RAL 6007	RAL 6006	RAL 6004
RAL 1018	RAL 1027	RAL 6001	Cedar Green	RAL 6008	RAL 5020
RAL 1016	RAL 1005	RAL 6002	RAL 6009		
CNH CE Gray	RAL 7038	RAL 7004	RAL 7047	Bright White	
RAL 7021	RAL 7030	RAL 7045	RAL 7036	RAL 9016	
CNH Dark Gray	RAL 7002	Deep Silver	RAL 7015	White	
RAL 9005	RAL 7023	RAL 7005	RAL 7012	RAL 9001	
RAL 7013	RAL 7000	RAL 7039	RAL 1013		
RAL 7010	RAL 7010	RAL 7010	Sand White		


Safety




11120 Safety Red




12246 OSHA Orange



13655 Safety Yellow



13591 Safety Yellow



13670 Safety Lime




15092 Safety Blue

Specialty



Sparkle Red



Sparkle Green




Sparkle Blue




Vivid Blue Metallic




Silver Metallic




Sparkle Black




Charcoal Metallic



Sea Ark Gold Mist




Sparkle Silver



Platinum

Primers



Gray Epoxy Primer



Buff Epoxy Primer



Black Epoxy Primer



White Epoxy Primer



Red Oxide Epoxy Primer




YOU CAN'T BEAT THE SPREAD

**BUILT STRONG AND
BUILT TO LAST**
OUR CUSTOMERS LIKE THE
VERSATILITY OF MATERIALS
THAT AN ARTEX CAN HANDLE

For proof of our spreaders' toughness, visit:

ARTEXMFG.COM/VIDEO-GALLERY

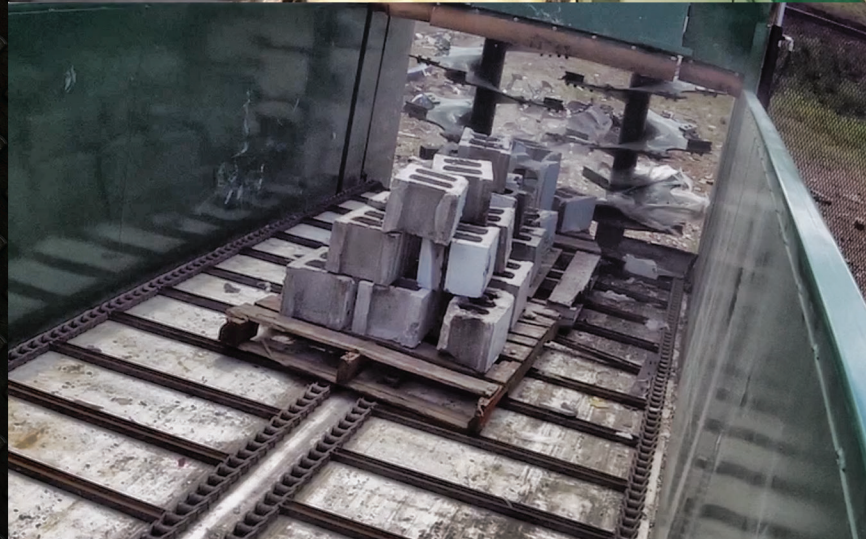

FARMERS DON'T SAY MUCH, UNLESS THEY'VE GOT SOMETHING REALLY IMPORTANT TO SAY.

We like the Artex spreader pattern, it spreads more acres, therefore helps on the fertilizer purchase. The Artex spreader has been trouble free.

- JIM ANDERSON, ANDERSON CATTLE COMPANY, SPRINGFIELD, MN (SB600 & SBX700 - Customer since 2022)

We used it this fall and spread everything from fresh bedding to a 10-year-old pile of manure. It handled it all amazingly, no piling and a uniform spread on everything! Simple enough for my 80-year-old father to run.

- JEFF KIPPLEY, ABERDEEN, SD (SBX800 - Customer since 2025)

If you want reliability and depend on your equipment, then Artex is your key to success. If you have 1 or 1,500 loads, it will handle any job you can put it up to on your operation!

- JOSH WULF, WERSAL LIVESTOCK, CLEMENTS, MN (SB600 & SBX800 - Customer since 2020)

"I stick to Artex Vertical Beaters and Raven Rate Control for a consistent spread of just about anything that can be run through a spreader. From frozen feedlot slop to horse manure straw, runny chicken litter to litter dust, damp ag lime to gypsum pellets.

- LAMAR LAUVER, MOHNTON, PA (SB700 & CB900 - Customer since 2021)

To hear what other farmers have to say about their Artex, visit: [ARTEXMFG.COM/TESTIMONIALS](https://artexmfg.com/testimonials).




SPECIALTY OPTIONS


LED LIGHT PACKAGE



3' LED bar (shines in box)
w/ 2 spot lights to see
spread pattern

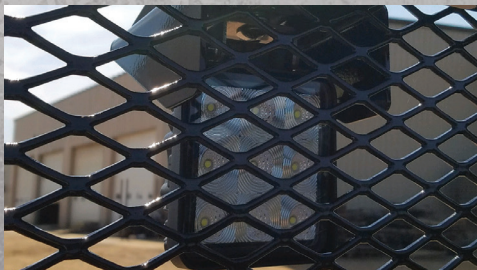

AMERICAN FLAG DECALS

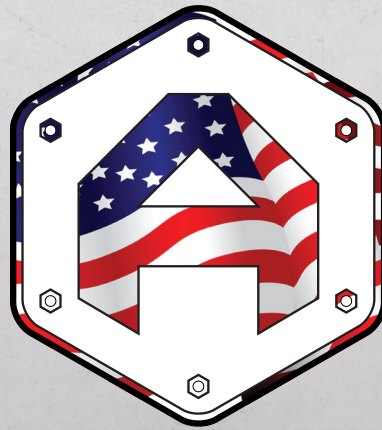

Available upon request




3" BLACK HMW POLY OR OAK TOP WALL TUBE PROTECTOR



Available upon request




SERIES/PARALLEL VALVE

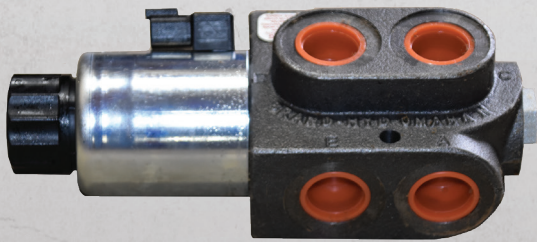


Electronically switch from Parallel to Series mode for faster unload speeds

GRAIN ATTACHMENT

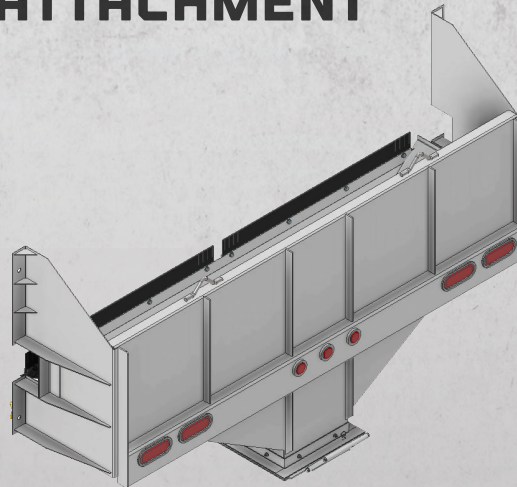

Funnels down for additional unload options

HIGH LIFT GATE

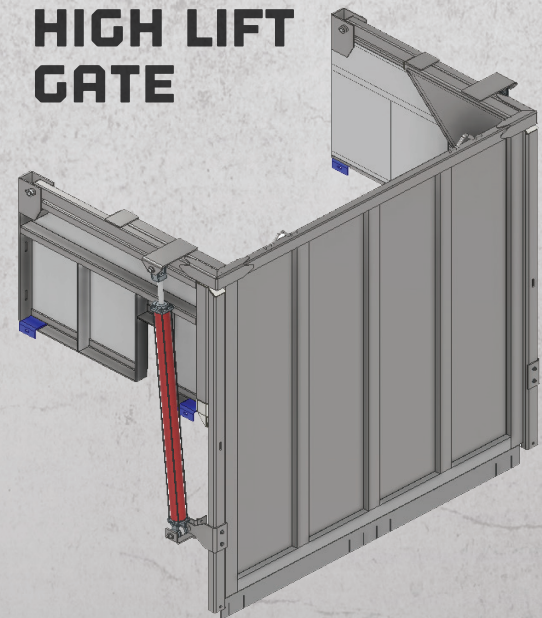

Lifts up and out of the way for faster unloading of material





LOG CHAIN


NEW

YOUR ARTEX OPTIONS JUST BECAME MORE DIVERSIFIED.

It's the same units you know and trust, just featuring a new option. We use a pre-stretched single apron 5/8" grade 80 log chain on all SB models, and a pre-stretched double apron 5/8" grade 80 log chain on all SBX/CB models.




LOG CHAIN IS AVAILABLE FOR ANY ARTEX MANURE SPREADER, PLEASE CALL FOR SPECIFIC MODEL SPECS

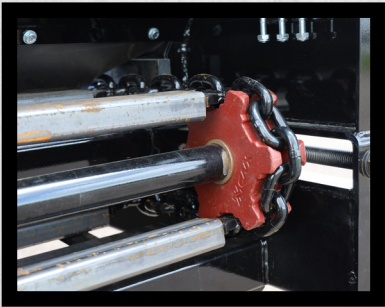

SBL600


LENGTH 22'
 WIDTH 5'6"
 HEIGHT 4'
 CAPACITY 605 CU. FT.
 HORSEPOWER 150

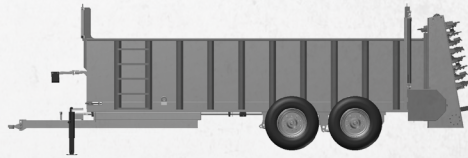


FEATURES

- 3/8" THICK TUBE CONSTRUCTION ON REACH
- 5/8" THICK FLIGHTING ON VERTICAL BEATER
- REMOVABLE REAR CHAIN DOORS
- 1/2" HMW POLY FLOOR
- TIRE SIZES AVAILABLE 425, 560, 600
- CHAIN REVERSING VALVE
- FLOOR SUPPORTS 9" ON CENTER
- 12.5 TON PER AXLE RATING (20,000 LBS)

STANDARD COLOR OPTIONS



Custom colors available upon request

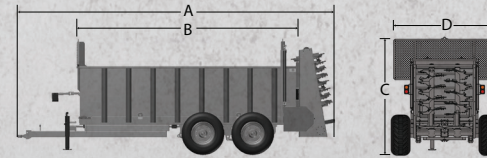

Model - SBL600							
Specs		Specifications					
A - Overall Length	360"	Unit Weight - Empty	12440	Augers		Augers Co.	
B - Inside Box Length	264"	Capacity		Diameter	34.5"	PTO	1 3/8" or 1/34"
Inside Box Length with Guillotine Gate	247"	Cubic Feet Struck	484	Flighting Thickness	15 mm	RPM	CV-1000
C - Overall Height	133"	Cubic Yards Heaped	22	Tube Diameter	6"	PTO Protection Shear Bolt	Yes
D - Overall Width	125"	Box Construction - Thickness	10Ga	Drive Shaft Diameter	1 3/4"	Brakes	Optional
Loading Height	87"	Axle Type	Tandem	Shear Paddles	Yes		

SPECIALTY FEATURES

10 GAUGE
STEEL WALLS

180 DEGREE
SWIVEL ARM FOR HYDRAULIC LINES

INSET GUILLOTINE GATE

ARTICULATING HITCH






WHEN THE GOING GETS TOUGH, THE TOUGH DEPEND ON ARTEX.

Not all spreaders are created equal. With spring suspension, vertical beaters, and smaller size - the S series is hard to top in quality.





TWIN VERTICAL BEATERS

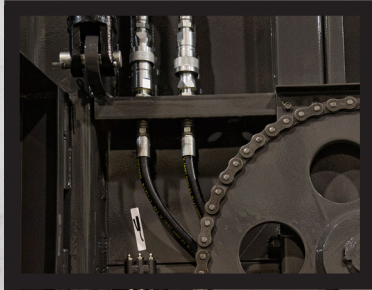

REMOTE GREASE BANKS




CHAIN FLOOR



SPRING SUSPENSION

S200

LENGTH 16'
WIDTH 5'
HEIGHT 3'
CAPACITY 320 CU. FT.
HORSEPOWER 90

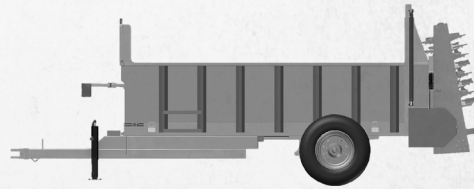

S350

LENGTH 20'
WIDTH 5'
HEIGHT 3'
CAPACITY 400 CU. FT.
HORSEPOWER 100




FEATURES

- 1/4" THICK TUBE CONSTRUCTION ON REACH
- 3/8" THICK FLIGHTING ON VERTICAL BEATER
- SINGLE DRIVE MOTOR
- REMOVABLE REAR CHAIN DOOR
- 7 TOOTH REAR CHAIN DRIVE SPROCKET
- 1/2" HMW POLY FLOOR
- TIRE SIZE: 425, 560
- CHAIN REVERSING VALVE
- FLOOR SUPPORTS 12" ON CENTER
- 12.5 TON PER AXLE RATING (25,000 LBS)

SPECIALTY FEATURES



STANDARD COLOR OPTIONS



Custom colors available upon request





SB SERIES

I'D TAKE COWS MOOING OVER HORNS HONKING ANY DAY!

Some may call us artists, we may be inclined to agree because this spreader is a work of art. Designed and developed with the customer in mind. Now, do you need one this tough? Well, that all depends on how often you like to buy them.

SB550

LENGTH 20'
WIDTH 5'6"
HEIGHT 4'
CAPACITY 560 CU. FT.



SPECIALTY FEATURES

10
GAUGE
STEEL WALLS

180
DEGREE
SWIVEL ARM FOR
HYDRAULIC LINES

**INSET
GUILLOTINE
GATE**

**ARTICULATING
HITCH**

88C
FLOORCHAIN




TWIN VERTICAL BEATERS

SB SERIES



SB300

LENGTH 14'
WIDTH 5'6"
HEIGHT 3'
CAPACITY 313 CU. FT.
HORSEPOWER 90

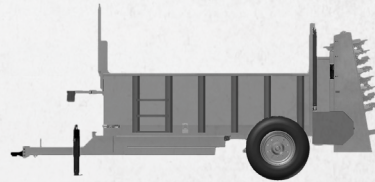

SB550

LENGTH 20'
WIDTH 5'6"
HEIGHT 4'
CAPACITY 560 CU. FT.
HORSEPOWER 120

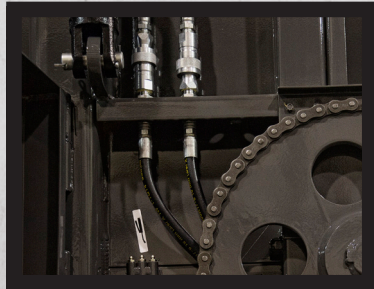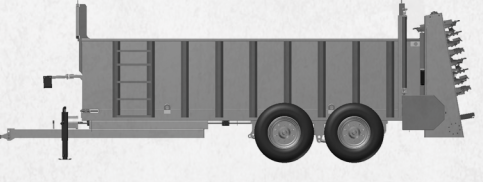

REMOTE GREASE BANKS


SB450

LENGTH 16'
WIDTH 5'6"
HEIGHT 4'
CAPACITY 448 CU. FT.
HORSEPOWER 100



SB600

LENGTH 22'
WIDTH 5'6"
HEIGHT 4'
CAPACITY 616 CU. FT.
HORSEPOWER 150

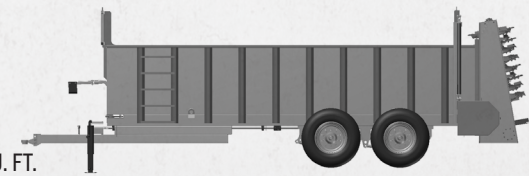

CHAIN FLOOR


SB500

LENGTH 18'
WIDTH 5'6"
HEIGHT 4'
CAPACITY 504 CU. FT.
HORSEPOWER 110



SB700 TANDEM

LENGTH 26'
WIDTH 5'6"
HEIGHT 4'
CAPACITY 728 CU. FT.
HORSEPOWER 175

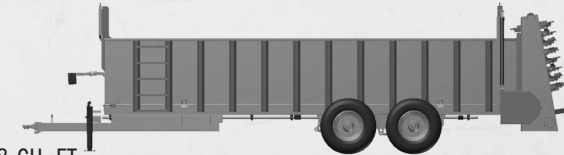


SPRING SUSPENSION

FEATURES

- 3/8" THICK TUBE CONSTRUCTION ON REACH
- 5/8" THICK FLIGHTING ON VERTICAL BEATER
- REMOVABLE REAR CHAIN DOORS
- 7 TOOTH REAR CHAIN DRIVE SPROCKET
- 1/2" HMW POLY FLOOR
- TIRE SIZES AVAILABLE
425, 560, 600
- CHAIN REVERSING VALVE
- FLOOR SUPPORTS 9" ON CENTER
- 12.5 TON PER AXLE RATING (25,000 LBS)

SB700 TRIPLE

LENGTH 26'
WIDTH 5'6"
HEIGHT 4'
CAPACITY 728 CU. FT.
HORSEPOWER 175

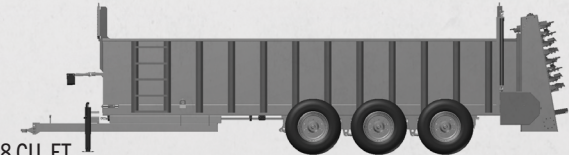

STANDARD COLOR OPTIONS



Custom colors available upon request





ALMOST AS TOUGH AS FARMING.

Some folks like a wider load, and we're more than happy to accommodate. Our SBX spreader series gives you an extra foot of width, making it easier and faster to fill. That's pretty big news for people with work to do, Artex has you covered.

SBX800

LENGTH 26'
WIDTH 6'6"
HEIGHT 4'
CAPACITY 858 CU. FT.



SPECIALTY FEATURES

10
GAUGE
STEEL WALLS

180
DEGREE
SWIVEL ARM FOR
HYDRAULIC LINES


**INSET
GUILLOTINE
GATE**

**ARTICULATING
HITCH**

88C
FLOORCHAIN



TWIN VERTICAL BEATERS

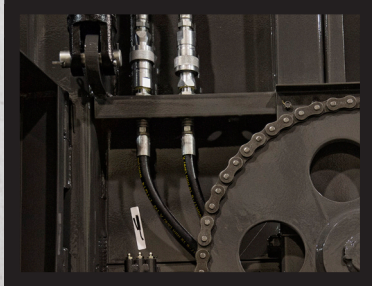

REMOTE GREASE BANKS



CHAIN FLOOR




SPRING SUSPENSION

SBX SERIES

SBX500

LENGTH 16'
WIDTH 6'6"
HEIGHT 4'
CAPACITY 528 CU. FT.
HORSEPOWER 110



SBX550

LENGTH 18'
WIDTH 6'6"
HEIGHT 4'
CAPACITY 594 CU. FT.
HORSEPOWER 120



SBX600

LENGTH 20'
WIDTH 6'6"
HEIGHT 4'
CAPACITY 660 CU. FT.
HORSEPOWER 150




FEATURES

- 3/8" THICK TUBE CONSTRUCTION ON REACH
- 5/8" THICK FLIGHTING ON VERTICAL BEATER
- REMOVABLE REAR CHAIN DOORS
- 7 TOOTH REAR CHAIN DRIVE SPROCKET
- 1/2" HMW POLY FLOOR
- TIRE SIZES AVAILABLE
425, 560, 600
- CHAIN REVERSING VALVE
- FLOOR SUPPORTS 9" ON CENTER
- 12.5 TON PER AXLE RATING (25,000 LBS)


SBX700 TANDEM

LENGTH 22'
WIDTH 6'6"
HEIGHT 4'
CAPACITY 726 CU. FT.
HORSEPOWER 175

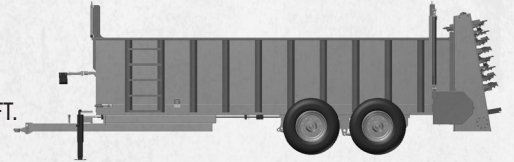


SBX700 TRIPLE

LENGTH 22'
WIDTH 6'6"
HEIGHT 4'
CAPACITY 726 CU. FT.
HORSEPOWER 175

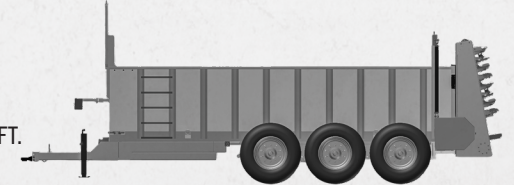

SBX800 TANDEM

LENGTH 26'
WIDTH 6'6"
HEIGHT 4'
CAPACITY 858 CU. FT.
HORSEPOWER 200

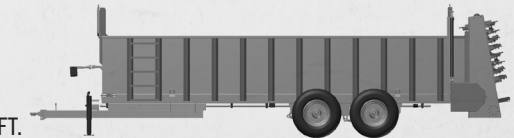

SBX800 TRIPLE

LENGTH 26'
WIDTH 6'6"
HEIGHT 4'
CAPACITY 858 CU. FT.
HORSEPOWER 200



STANDARD COLOR OPTIONS



Custom colors available upon request





SBX950

WELCOME TO THE BIG LEAGUES.

Now offering a bigger spreader in our low-profile series for those with lots of work and not a lot of time. With a low load height and an extra 4 feet of length for more volume, the SBX950 helps you get the job done smarter, not harder.



SPECIALTY FEATURES

10
GAUGE
STEEL WALLS

180
DEGREE
SWIVEL ARM FOR
HYDRAULIC LINES


**INSET
GUILLOTINE
GATE**

**ARTICULATING
HITCH**

**88C
FLOORCHAIN**



TWIN VERTICAL BEATERS

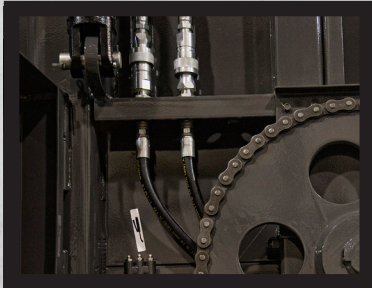

REMOTE GREASE BANKS



CHAIN FLOOR



SPRING SUSPENSION

SBX950 TRIPLE

LENGTH 30'
WIDTH 6'6"
HEIGHT 4'
CAPACITY 957 CU. FT.
HORSEPOWER 250



STANDARD COLOR OPTIONS



Custom colors available upon request

FEATURES

- 3/8" THICK TUBE CONSTRUCTION ON REACH
- 5/8" THICK FLIGHTING ON VERTICAL BEATER
- REMOVABLE REAR CHAIN DOORS
- 7 TOOTH REAR CHAIN DRIVE SPROCKET
- 1/2" HMW POLY FLOOR
- TIRE SIZES AVAILABLE
425, 560, 600
- CHAIN REVERSING VALVE
- FLOOR SUPPORTS 9" ON CENTER
- AIR OR HYDRAULIC BRAKES
- 12.5 TON PER AXLE RATING (25,000 LBS)





CB SERIES

THE HARDER I WORK, THE MORE LUCK I SEEM TO HAVE.

You never know what you're gonna face on the farm. Good thing is, this heaviest-of-duties pull-type spreader manages all types of solid manure and adapts to just about any spread material you can imagine. So whatever life throws at you, you can blow it to smithereens.



SPECIALTY FEATURES

10
GAUGE
STEEL WALLS

180
DEGREE
SWIVEL ARM FOR
HYDRAULIC LINES


**INSET
GUILLOTINE
GATE**

**ARTICULATING
HITCH**

**88C
FLOORCHAIN**



TWIN VERTICAL BEATERS

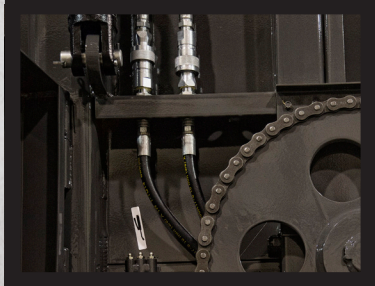

REMOTE GREASE BANKS



CHAIN FLOOR




SUSPENSION

CB SERIES


CB700

LENGTH 20'
WIDTH 7'6"
HEIGHT 4'
CAPACITY 750 CU. FT.
HORSEPOWER 150

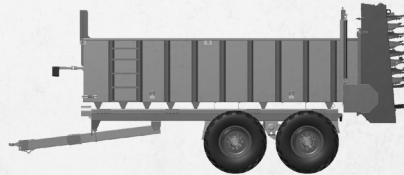

CB800

LENGTH 22'
WIDTH 7'6"
HEIGHT 4'
CAPACITY 825 CU. FT.
HORSEPOWER 180

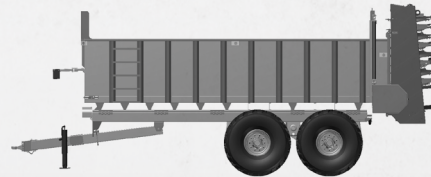

CB900

LENGTH 24'
WIDTH 7'6"
HEIGHT 4'
CAPACITY 900 CU. FT.
HORSEPOWER 200



CB1000

LENGTH 26'
WIDTH 7'6"
HEIGHT 4'
CAPACITY 1000 CU. FT.
HORSEPOWER 225



CB1200

LENGTH 30'
WIDTH 7'6"
HEIGHT 4'
CAPACITY 1125 CU. FT.
HORSEPOWER 250



STANDARD COLOR OPTIONS



Custom colors available upon request

FEATURES

- 1/2" THICK TUBE CONSTRUCTION ON REACH
- 5/8" THICK FLIGHTING ON VERTICAL BEATER
- REMOVABLE REAR CHAIN DOORS
- 7 TOOTH REAR CHAIN DRIVE SPROCKET
- 1/2" HMW POLY FLOOR
- TIRE SIZES AVAILABLE 600, 750
- CHAIN REVERSING VALVE
- FLOOR SUPPORTS 9" ON CENTER
- 15 TON PER AXLE RATING (30,000 LBS)
- UNDERCARRIAGE COMES STANDARD WITH HYDRAULIC BRAKES
- UNDERCARRIAGE EQUIPPED WITH SELF-STEER TECHNOLOGY
- AIR OR HYDRAULIC BRAKES





CB TRUCK

NEARLY FANCY ENOUGH TO DRIVE TO SUNDAY BRUNCH.

This mobile monster offers a lot of great features, but perhaps the best is its attachment versatility. It was designed so that all Artex attachments mount onto the rear, utilizing your investment as much as possible and enabling equipment changes in about an hour.



SPECIALTY FEATURES

10 GAUGE
STEEL WALLS

CLOSED LOOP
HYDRAULIC SYSTEM

INSET GUILLOTINE GATE


88C FLOORCHAIN

CB2004

LENGTH 20'
WIDTH 7'6"
HEIGHT 4'
CAPACITY 760 CU. FT.



TWIN VERTICAL BEATERS

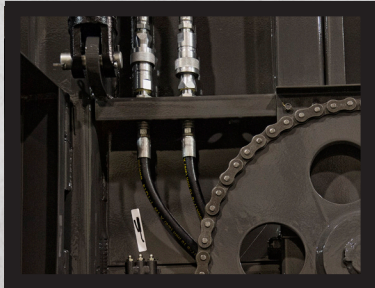

REMOTE GREASE BANKS



CHAIN FLOOR




HYDRAULIC MANIFOLD KIT

CB TRUCK SERIES


CB1804

LENGTH 18'
WIDTH 7'6"
HEIGHT 4'
CAPACITY 684 CU. FT.

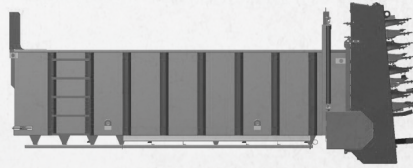


CB2404

LENGTH 24'
WIDTH 7'6"
HEIGHT 4'
CAPACITY 912 CU. FT.

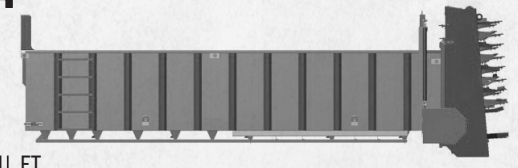

CB2004

LENGTH 20'
WIDTH 7'6"
HEIGHT 4'
CAPACITY 760 CU. FT.

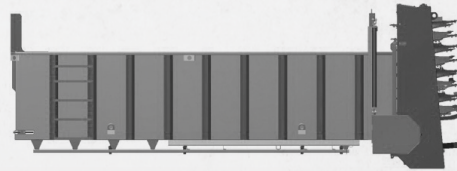

CB2604

LENGTH 26'
WIDTH 7'6"
HEIGHT 4'
CAPACITY 988 CU. FT.



CB2204

LENGTH 22'
WIDTH 7'6"
HEIGHT 4'
CAPACITY 836 CU. FT.



Box mounting offered through our factory on customer provided chassis excluding cab controls and PTO installation

STANDARD COLOR OPTIONS



Custom colors available upon request

FEATURES

- 5/8" THICK FLIGHTING ON VERTICAL BEATER
- REMOVABLE REAR CHAIN DOORS
- 7 TOOTH REAR CHAIN DRIVE SPROCKET
- 1/2" HMW POLY FLOOR
- CHAIN REVERSING VALVE
- FLOOR SUPPORTS 9" ON CENTER
- 2' FRONT BULKHEAD








OUR VERSION OF A CONVERTIBLE.

Spread manure, compost, paper waste, bio-solids, poultry litter, and more. It doesn't really matter because this spreader has proven it can stand up to whatever your chores require. Even hauling silage, just remove the beaters and drop in the tailgate.



SPECIALTY FEATURES




CT3605


LENGTH 36'
 WIDTH 7'6"
 HEIGHT 4'
 CAPACITY 1360 CU. FT.



TWIN VERTICAL BEATERS

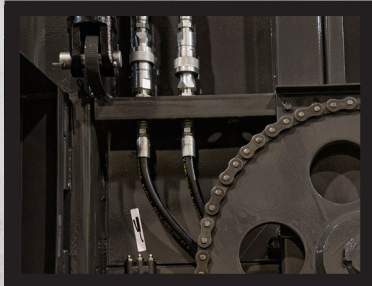

REMOTE GREASE BANKS

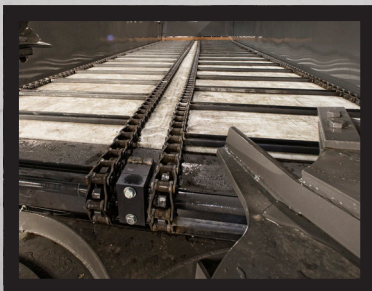

CHAIN FLOOR

FEATURES


- REMOVABLE REAR CHAIN DOORS
- 7 TOOTH REAR CHAIN DRIVE SPROCKET
- 1/2" HMW POLY FLOOR
- FLOOR SUPPORTS 9" ON CENTER
- TIRE SIZES AVAILABLE
11R22.5, 11R24.5
- 12.5 TON PER AXLE RATING (25,000 LBS)

CT SERIES

CT3004

LENGTH 30'
WIDTH 7'6"


HEIGHT 4'
CAPACITY 1140 CU. FT.

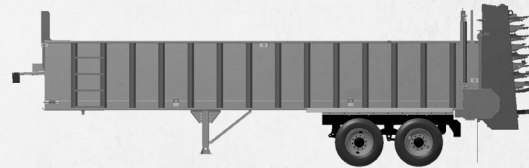

CT3604

LENGTH 36'
WIDTH 7'6"


HEIGHT 4'
CAPACITY 1360 CU. FT.

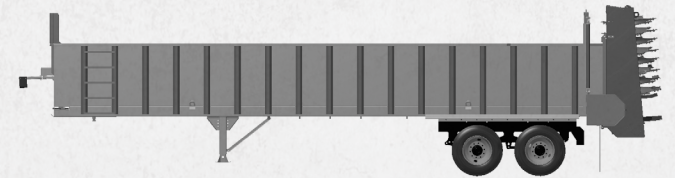

CT3204

LENGTH 32'
WIDTH 7'6"

HEIGHT 4'
CAPACITY 1210 CU. FT.

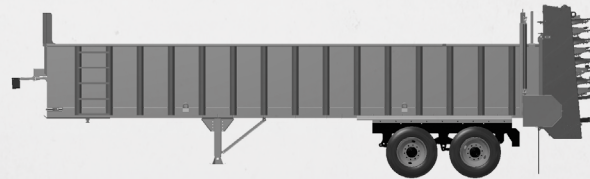

CT3804

LENGTH 38'
WIDTH 7'6"


HEIGHT 4'
CAPACITY 1400 CU. FT.



CT3404

LENGTH 34'
WIDTH 7'6"

HEIGHT 4'
CAPACITY 1290 CU. FT.

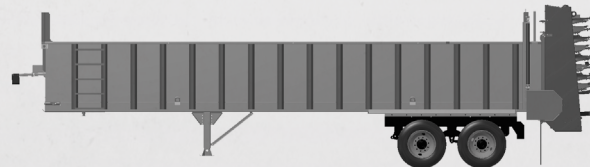

CT4004

LENGTH 40'
WIDTH 7'6"

HEIGHT 4'
CAPACITY 1520 CU. FT.



STANDARD COLOR OPTIONS



Custom colors available upon request

ALL MODELS ALSO AVAILABLE WITH A 5' WALL





TR SERIES

DRINK SOME COFFEE, PUT YOUR BOOTS ON AND GET THE JOB DONE.

Struggling with not having enough hours in the day? Our trailers are built to save you hours with a fast unloading time. Especially when they're hand-built to handle the brutal demands of life on the farm.

TR3806


LENGTH 38'
WIDTH 8'
HEIGHT 6'
CAPACITY 2128 CU. FT.



SPECIALTY FEATURES



12
GAUGE
STEEL WALLS



88C
FLOORCHAIN




FULL
REAR
MUD FLAPS

TR SERIES

TR300b

LENGTH 30'
HEIGHT 6'


WIDTH 8'
CAPACITY 1680 CU. FT.

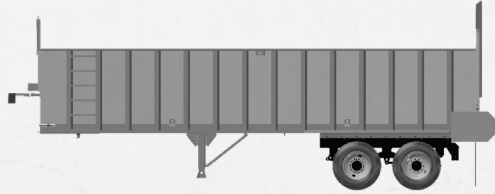

TR360b

LENGTH 36'
HEIGHT 6'


WIDTH 8'
CAPACITY 2016 CU. FT.

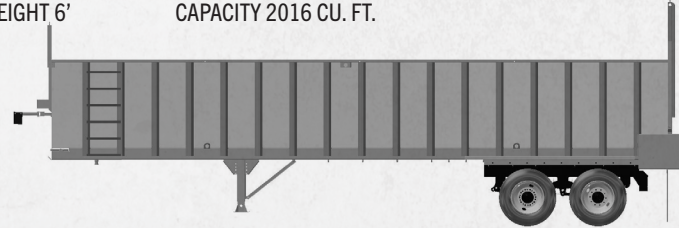

TR320b

LENGTH 32'
HEIGHT 6'

WIDTH 8'
CAPACITY 1792 CU. FT.

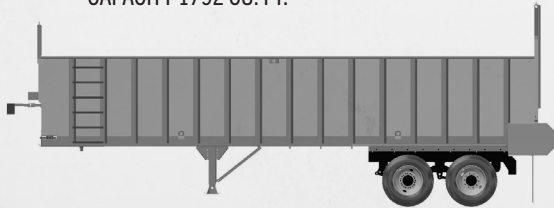

TR380b

LENGTH 38'
HEIGHT 6'


WIDTH 8'
CAPACITY 2128 CU. FT.



TR340b

LENGTH 34'
HEIGHT 6'


WIDTH 8'
CAPACITY 1904 CU. FT.

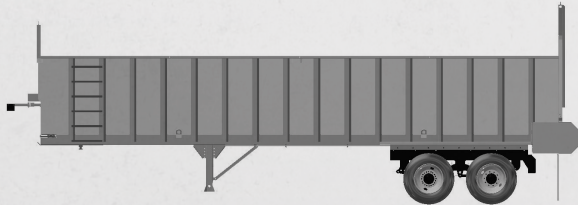

TR400b

LENGTH 40'
HEIGHT 6'

WIDTH 8'
CAPACITY 2240 CU. FT.

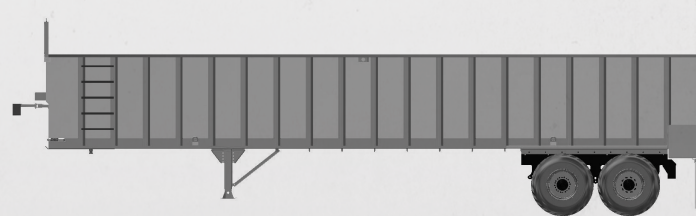


ALL MODELS ALSO AVAILABLE WITH A 5' WALL

FEATURES

- REMOVABLE REAR CHAIN DOORS
- 7 TOOTH REAR CHAIN DRIVE SPROCKET
- 1/2" HMW POLY FLOOR
- FLOOR SUPPORTS 9" ON CENTER
- TIRE SIZES AVAILABLE
11R22.5, 11R24.5
- 12.5 TON PER AXLE RATING (25,000 LBS)

COLOR OPTIONS

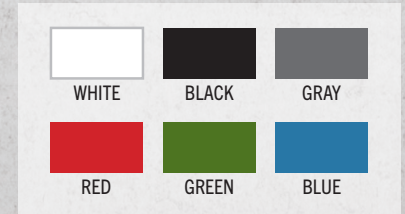

Custom colors available upon request





A FARM IS MORE THAN LAND AND CROPS; IT'S A FAMILY HERITAGE AND FUTURE.



Drop this box on the back of a truck and cut your silage processing time to shreds. It's easy to load in the field, it unloads in a flash, and it stands up to anything you throw at it. So you can rest easy.

TB2205

LENGTH 22'
WIDTH 8'
HEIGHT 5'
CAPACITY 1541 CU. FT.




SPECIALTY FEATURES



TB SERIES


TB200b

LENGTH 20'
WIDTH 8'
HEIGHT 6'
CAPACITY 1620 CU. FT.

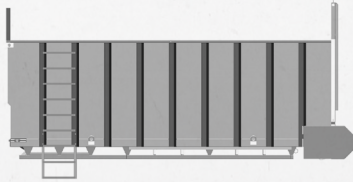


TB220b

LENGTH 22'
WIDTH 8'
HEIGHT 6'
CAPACITY 1783 CU. FT.

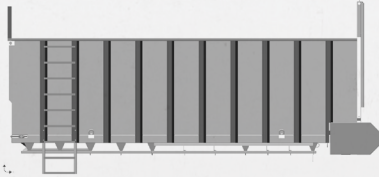


TB240b

LENGTH 24'
WIDTH 8'
HEIGHT 6'
CAPACITY 1946 CU. FT.

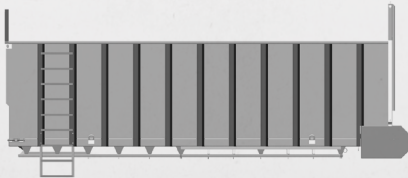

TB260b

LENGTH 26'
WIDTH 8'
HEIGHT 6'
CAPACITY 2109 CU. FT.

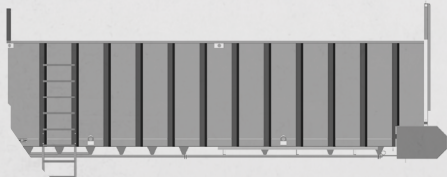

FEATURES

- REMOVABLE REAR CHAIN DOORS
- 7 TOOTH REAR CHAIN DRIVE SPROCKET
- 1/2" HMW POLY FLOOR
- FLOOR SUPPORTS 9" ON CENTER
- TIRE SIZES AVAILABLE
11R22.5, 11R24.5

BOX MOUNTING OFFERED THROUGH OUR FACTORY ON CUSTOMER PROVIDED CHASSIS EXCLUDING PTO INSTALLATION

STANDARD COLOR OPTIONS



Custom colors available upon request



ALL MODELS ALSO AVAILABLE WITH A 5' WALL





HIGH DUMP

WE'RE IN THE BUSINESS OF MAKING THINGS EASIER FOR YOU.

Not only do we offer an impressive lineup of spreaders, we also have other equipment that will be beneficial to your operation. Just hook it up to your tractor and get working, you'll notice the time you save. And that other project you didn't have time to do? Consider your calendar open.






ANTI-FALL CYLINDER

SHD1100



LENGTH 15'
 WIDTH 12'
 HEIGHT 13'
 CAPACITY 600 CU. FT.
 HORSEPOWER 200

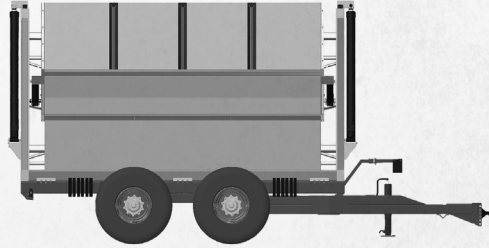

FEATURES

- 3/8" THICK TUBE CONSTRUCTION ON REACH
- TIRE SIZE: 750
- SOLID BOTTOM WITH DRAINS
- COUNTER WEIGHT BRACKETS - WEIGHTS AND HARDWARE ARE NOT INCLUDED
- ADJUSTABLE HITCH LADDER
- VARIABLE HEIGHT OFF LOAD
- 30 TON UNDERCARRIAGE (TANDEM)
- OPTIONAL EXTENSIONS AVAILABLE: HIGH CAPACITY - 1,062 CU. FT.
- 12.5 TON PER AXLE RATING (25,000 LBS)

SPECIALTY FEATURES



ADJUSTABLE HITCH LADDER


STANDARD COLOR OPTIONS



Custom colors available upon request



COUNTER WEIGHT BRACKETS

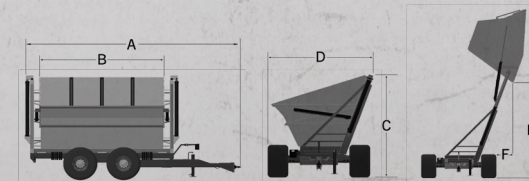

Model	SHD1100						
A - Overall Length	311"	Loading Height	111"	Box Construction - Thickness	10 Ga	Distance to Trailer Clearance	
B - Inside Box Length	180"	Capacity		Height Clearance		Min	8"
C - Overall Height	156"	Cubic Feet	600	Min	129"	F - Max	32"
D - Overall Width	147"	Cubic Yards	23	E - Max	197"		






LIVE-BOTTOM TRAILER

IT'S MORE THAN JUST A FARM, AND WE'RE MORE THAN JUST SPREADERS.

We're revolutionizing our game and taking you along for the ride. This tractor-pulled piece of equipment will not only look great sitting in your yard, but it will be a valued added asset to your operation. Making completing tasks more efficient.

NEW




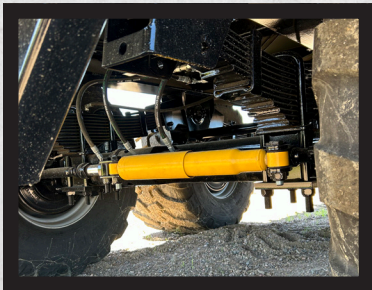

STEERABLE AXLES

LB3605

LENGTH 36'
WIDTH 8'
WALL HEIGHT 5'
CAPACITY 2592 CU. FT.
HORSEPOWER 375

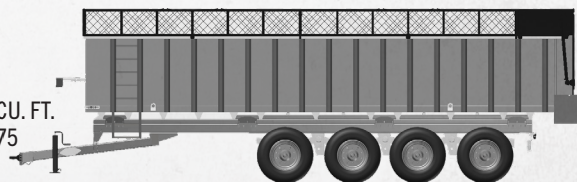




FEATURES

- REMOVABLE REAR CHAIN DOORS
- 7 TOOTH REAR CHAIN DRIVE SPROCKET
- 1/2" HMW POLY FLOOR
- FLOOR SUPPORTS 9" ON CENTER
- TIRE SIZES AVAILABLE - 750 45R22.5
- 15 TON PER AXLE RATING (30,000 LBS)
- UNDERCARRIAGE COMES STANDARD WITH HYDRAULIC BRAKES
- UNDERCARRIAGE EQUIPPED WITH SELF-STEER TECHNOLOGY
- AIR OR HYDRAULIC BRAKES




HYDRAULIC LIFT REAR TAILGATE

SPECIALTY FEATURES

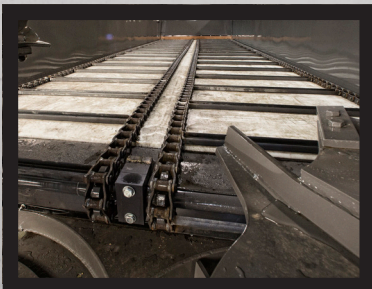

CHAIN FLOOR

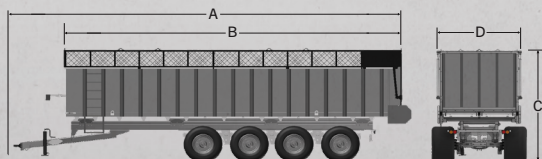

Model	LB3605		
A - Overall Length	516"	Capacity	
B - Inside Box Length	430"	Cubic Feet (With Extensions)	2444
C - Overall Height	157"	Cubic Yards (With Extensions)	90
D - Overall Width	124"	Box Construction - Thickness	12 Ga
Loading Height	130"		

STANDARD COLOR OPTIONS



Custom colors available upon request



SUSPENSION





YOUR FARM JUST GOT ITS FIRST FLOTATION DEVICE.

No you're not dreaming, you're looking at Trax on an Artex! We're talking lower pounds per square inch and a wider track width, creating better flotation and less compaction giving plant roots a better shot at growth.

See you never, ruts. Hello, bumper crop.




**SPECIALTY
FEATURES**

36"
TRACK WIDTH

**LOWER
COMPACTION
RATE**


V4 TRAX

SB/SBX LENGTH 107"
CAPACITY 91,000
6" SPINDLE
WIDTH 36"

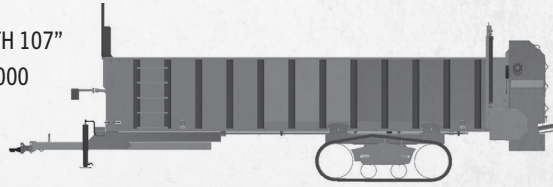

STABILIZER TRAX2

CB LENGTH 118"
CAPACITY 120,000
7" SPINDLE
WIDTH 36"

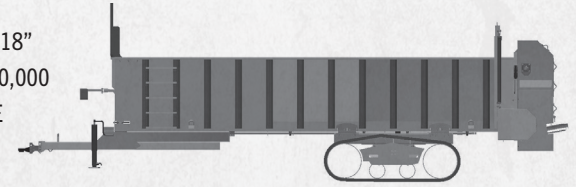



CYCLONE

REAP THE WHIRLWIND!

SPECIFICALLY DESIGNED FOR POULTRY LITTER.

Add the Cyclone to the back of any model spreader, and poultry litter is no longer a problem. It takes light, low-moisture materials and spreads them consistently as wide as 60 feet. But that's not all. Optimize your nutrient application by pairing the Cyclone with our Raven variable rate system.

CYCLONE

- AVAILABLE FOR ALL MODELS
- OVERLAPPING TIMED SPINNERS
- EASILY ACCESSIBLE REMOTE GREASE BANKS
- DRIVE LINE SHEAR BOLT PROTECTED



SPECIALTY FEATURES

UP TO **60'**
SPREAD

USED FOR
POULTRY
LITTER

TWIN
HORIZONTAL
BEATERS

ADJUSTABLE
PADDLES AND
REAR GATE

IF ONLY THE WEATHER COULD BE CONTROLLED LIKE THIS.

TECHNOLOGY

Work with Artex and Raven, and you'll know exactly what you're spreading.

Control your target spreading rate with the most innovative and easiest to use equipment, simply by entering it into the keypad. Then let our automated system take care of the rest.

FEATURES

- Fully automated spreader control makes spreading less work
- Constant monitoring gives you feedback on
 - Ground speed
 - Floor chain speed
 - Application rate
 - Total/partial area
 - Total/partial weight
 - Live weight in the spreader
- ISO setup; if tractor is ISO equipped with a VT, simply plug in the IBBC and it can run on the existing display



- Records to task controller
- Spreader automatically adjusts to variations using dynamic calibration
- Information can be downloaded to a USB stick
- Application rate is automatically maintained by varying the unloading rate in proportion to ground speed
- Quick-start function to prime the spreader
- CR7 can be used as a 2nd display for viewing





BUILT RELIABLE WITH YOU IN MIND

We build trailers for your rendering needs; trailers built with pride to last for years of dependable service.






CUSTOM FEATURES

- Extruded Hollow Wall Construction
- Spring or Air Suspension
- Heavy Duty Hydraulics
- Leak Proof Gates
- Two Point Controls
- Compartments for Material Separation
- 2 & 3 25,000lb Axles




MODEL SPECIFICATIONS

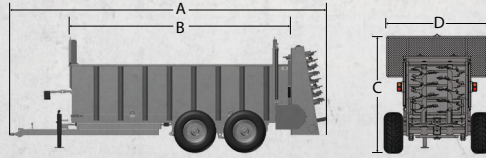

SB SERIES


Model	S200	S350	SB300	450	500	550	600	700	700 Triple
A - Overall Length	291.5"	341"	263"	286"	311"	334"	360"	405"	405"
B - Inside Box Length	192"	240"	168"	192"	216"	239"	264"	312"	312"
Inside Box Length with Guillotine Gate	175"	222"	151"	174"	198"	222"	247"	294"	294"
C - Overall Height	113"	113"	114"	133"	133"	133"	133"	136"	114"
D - Overall Width	120"	120"	125"	125"	125"	125"	125"	125"	125"
Loading Height	75"	75"	75"	87"	87"	87"	87"	87"	87"
Specifications									
Unit Weight - Empty	7500	8500	9450	11420	12024	12578	12440	14140	15640
Capacity									
Cubic Feet Struck	240	300	308	352	396	440	484	572	572
Cubic Yards Heaped	9.8	14.8	14	16	18	20	22	26	26
Augers									
Diameter	31.2"	31.2"	34.5"	34.5"	34.5"	34.5"	34.5"	34.5"	34.5"
Flighting Thickness	10 mm	10 mm	15 mm	15 mm	15 mm	15 mm	15 mm	15 mm	15 mm
Tube Diameter	5.3"	5.3"	6"	6"	6"	6"	6"	6"	6"
Drive Shaft Diameter	1 3/4"	1 3/4"	1 3/4"	1 3/4"	1 3/4"	1 3/4"	1 3/4"	1 3/4"	1 3/4"
Shear Paddles	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
PTO	1 3/8" or 1 3/4"	1 3/8" or 1 3/4"	1 3/8" or 1 3/4"	1 3/8" or 1 3/4"	1 3/8" or 1 3/4"	1 3/8" or 1 3/4"	1 3/8" or 1 3/4"	1 3/8" or 1 3/4"	1 3/8" or 1 3/4"
RPM	CV-1000	CV-1000	CV-1000	CV-1000	CV-1000	CV-1000	CV-1000	CV-1000	CV-1000
PTO Protection Shear Bolt	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Box Construction - Thickness	12Ga	12Ga	10Ga	10Ga	10Ga	10Ga	10Ga	10Ga	10Ga
Axle Type - Single/Tandem/Triple	Single	Tandem	Single	Tandem	Tandem	Tandem	Tandem	Tandem	Triple
Brakes	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional

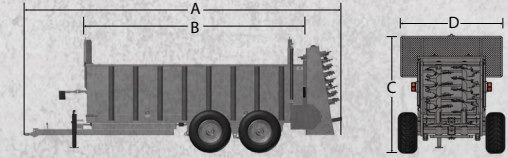

SBX SERIES


Model	SBX500	550	600	700	700 Triple	800	800 Triple	950
A - Overall Length	292"	315"	338"	363"	363"	408"	408"	467"
B - Inside Box Length	193"	216"	240"	264"	264"	312"	312"	360"
Inside Box Length with Guillotine Gate	175"	199"	222"	247"	247"	294"	294"	336"
C - Overall Height	133"	133"	133"	136"	114"	136"	114"	114"
D - Overall Width	138"	138"	138"	138"	138"	138"	138"	138"
Loading Height	87"	87"	87"	87"	87"	87"	87"	89"
Specifications								
Unit Weight - Empty	12975	13040	13275	13760	15260	15400	16900	17,200
Capacity								
Cubic Feet Struck	416	468	520	572	572	676	676	780
Cubic Yards Heaped	19	22	24	27	27	31	31	36
Augers								
Diameter	38.75"	38.75"	38.75"	38.75"	38.75"	38.75"	38.75"	38.75"
Flighting Thickness	15 mm	15 mm	15 mm	15 mm	15 mm	15 mm	15 mm	15 mm
Tube Diameter	6"	6"	6"	6"	6"	6"	6"	6"
Shear Paddles	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
PTO	1 3/8" or 1 3/4"	1 3/8" or 1 3/4"	1 3/8" or 1 3/4"	1 3/8" or 1 3/4"	1 3/8" or 1 3/4"	1 3/8" or 1 3/4"	1 3/8" or 1 3/4"	1 3/8" or 1 3/4"
RPM	CV-1000	CV-1000	CV-1000	CV-1000	CV-1000	CV-1000	CV-1000	CV-1000
PTO Protection Shear Bolt	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Box Construction - Thickness	10Ga	10Ga	10Ga	10Ga	10Ga	10Ga	10Ga	10Ga
Axle Type - Single/Tandem/Triple	Tandem	Tandem	Tandem	Tandem	Triple	Tandem	Triple	Triple
Brakes	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Standard

CB SERIES

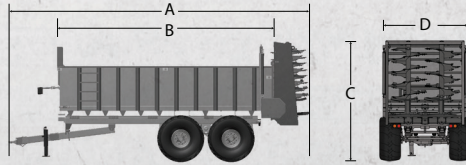

Model	CB700	800	900	1000	1200
A - Overall Length	353"	369"	393"	418"	468"
B - Inside Box Length	241"	264"	288"	312"	360"
Inside Box Length with Guillotine Gate	223"	247"	271"	295"	343"
C - Overall Height	149"	149"	149"	149"	149"
D - Overall Width	116"	116"	116"	116"	116"
Loading Height	118"	118"	118"	118"	118"
Specifications					
Unit Weight - Empty				23270	27080
Capacity					
Cubic Feet Heaped	753	825	900	975	1125
Cubic Yards Heaped	28	31	33	36	42
Augers					
Diameter	42"	42"	42"	42"	42"
Flighting Thickness	15 mm	15 mm	15 mm	15 mm	15 mm
Tube Diameter	6"	6"	6"	6"	6"
Shear Paddles	Yes	Yes	Yes	Yes	Yes
PTO	1 3/4"	1 3/4"	1 3/4"	1 3/4"	1 3/4"
RPM	CV-1000	CV-1000	CV-1000	CV-1000	CV-1000
PTO Protection Shear Bolt	Yes	Yes	Yes	Yes	Yes
Box Construction - Thickness	10 Ga	10 Ga	10 Ga	10 Ga	10 Ga
Axle Type - Single/Tandem/Triple	Tandem	Tandem	Tandem	Tandem	Triple
Brakes	Standard	Standard	Standard	Standard	Standard

TB SERIES

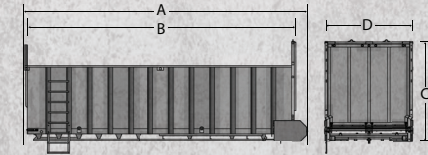


Model	TB2005-6	2205-6	2405-6	2605-6
A - Overall Length	258"	282"	306"	330"
B - Inside Box Length	238.5"	262.5"	286.5"	310.5"
C - Overall Height	118"	118"	118"	118"
D - Overall Width	102"	102"	102"	102"
Wall Height	76.5"/88.5"	76.5"/88.5"	76.5"/88.5"	76.5"/88.5"
Specifications				
Capacity				
Cubic Feet Heaped	1400/1620	1541/1783	1682/1946	1823/2109
Cubic Yards Heaped	52/60	57/66	66/62	68/78
Box Construction - Thickness	12 Ga	12 Ga	12 Ga	12 Ga




MODEL SPECIFICATIONS

CB TRUCK

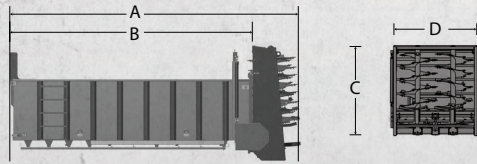

Model	CB1804	2004	2204	2404	2604
A - Overall Length	260"	284"	308"	332"	357"
B - Inside Box Length	217"	241"	265"	289"	313"
Inside Box Length with Guillotine Gate	199"	95"	247"	271"	295"
C - Overall Height	48"	48"	48"	48"	48"
D - Overall Width	102"	102"	102"	102"	102"
Specifications					
Capacity					
Cubic Feet Heaped	684	760	836	912	988
Cubic Yards Heaped	25	28	31	34	37
Augers					
Diameter	42"	42"	42"	42"	42"
Flighting Thickness	15 mm	15 mm	15 mm	15 mm	15 mm
Tube Diameter	6"	6"	6"	6"	6"
Shear Paddles	Yes	Yes	Yes	Yes	Yes
PTO Protection Shear Bolt	Yes	Yes	Yes	Yes	Yes
Box Construction - Thickness	10Ga	10Ga	10Ga	10Ga	10Ga
Brakes	Standard	Standard	Standard	Standard	Standard

CT SERIES

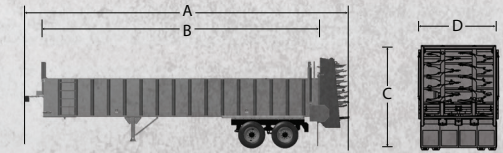


Model	CT3004	3204	3404	3604	3804	4004
A - Overall Length	404"	428"	452"	475"	500"	524"
B - Inside Box Length	361"	385"	409"	433"	456"	481"
Inside Box Length with Guillotine Gate	343"	367"	391"	415"	438"	462"
C - Overall Height	134"	134"	134"	134"	134"	134"
D - Overall Width	102"	102"	102"	102"	102"	102"
Loading Height	104"	104"	104"	104"	104"	104"
Specifications						
Capacity						
Cubic Feet Heaped	1140	1210	1290	1360	1400	1520
Cubic Yards Heaped	42	45	48	50	52	56
Augers						
Diameter	42"	42"	42"	42"	42"	42"
Flighting Thickness	15 mm	15 mm	15 mm	15 mm	15 mm	15 mm
Tube Diameter	6"	6"	6"	6"	6"	6"
Shear Paddles	Yes	Yes	Yes	Yes	Yes	Yes
PTO Protection Shear Bolt	Yes	Yes	Yes	Yes	Yes	Yes
Box Construction - Thickness	10Ga	10Ga	10Ga	10Ga	10Ga	10Ga
Axle Type - Single/Tandem/Triple	Tandem	Tandem	Tandem	Tandem	Tandem	Tandem
Brakes	Standard	Standard	Standard	Standard	Standard	Standard

FIND A DEALER LOCATION NEAR YOU

To see a current map of our dealers, please visit <https://artexmfg.com/find-a-dealer/>

Don't see a dealer close to you? Contact us and give us the dealer location suggestion!



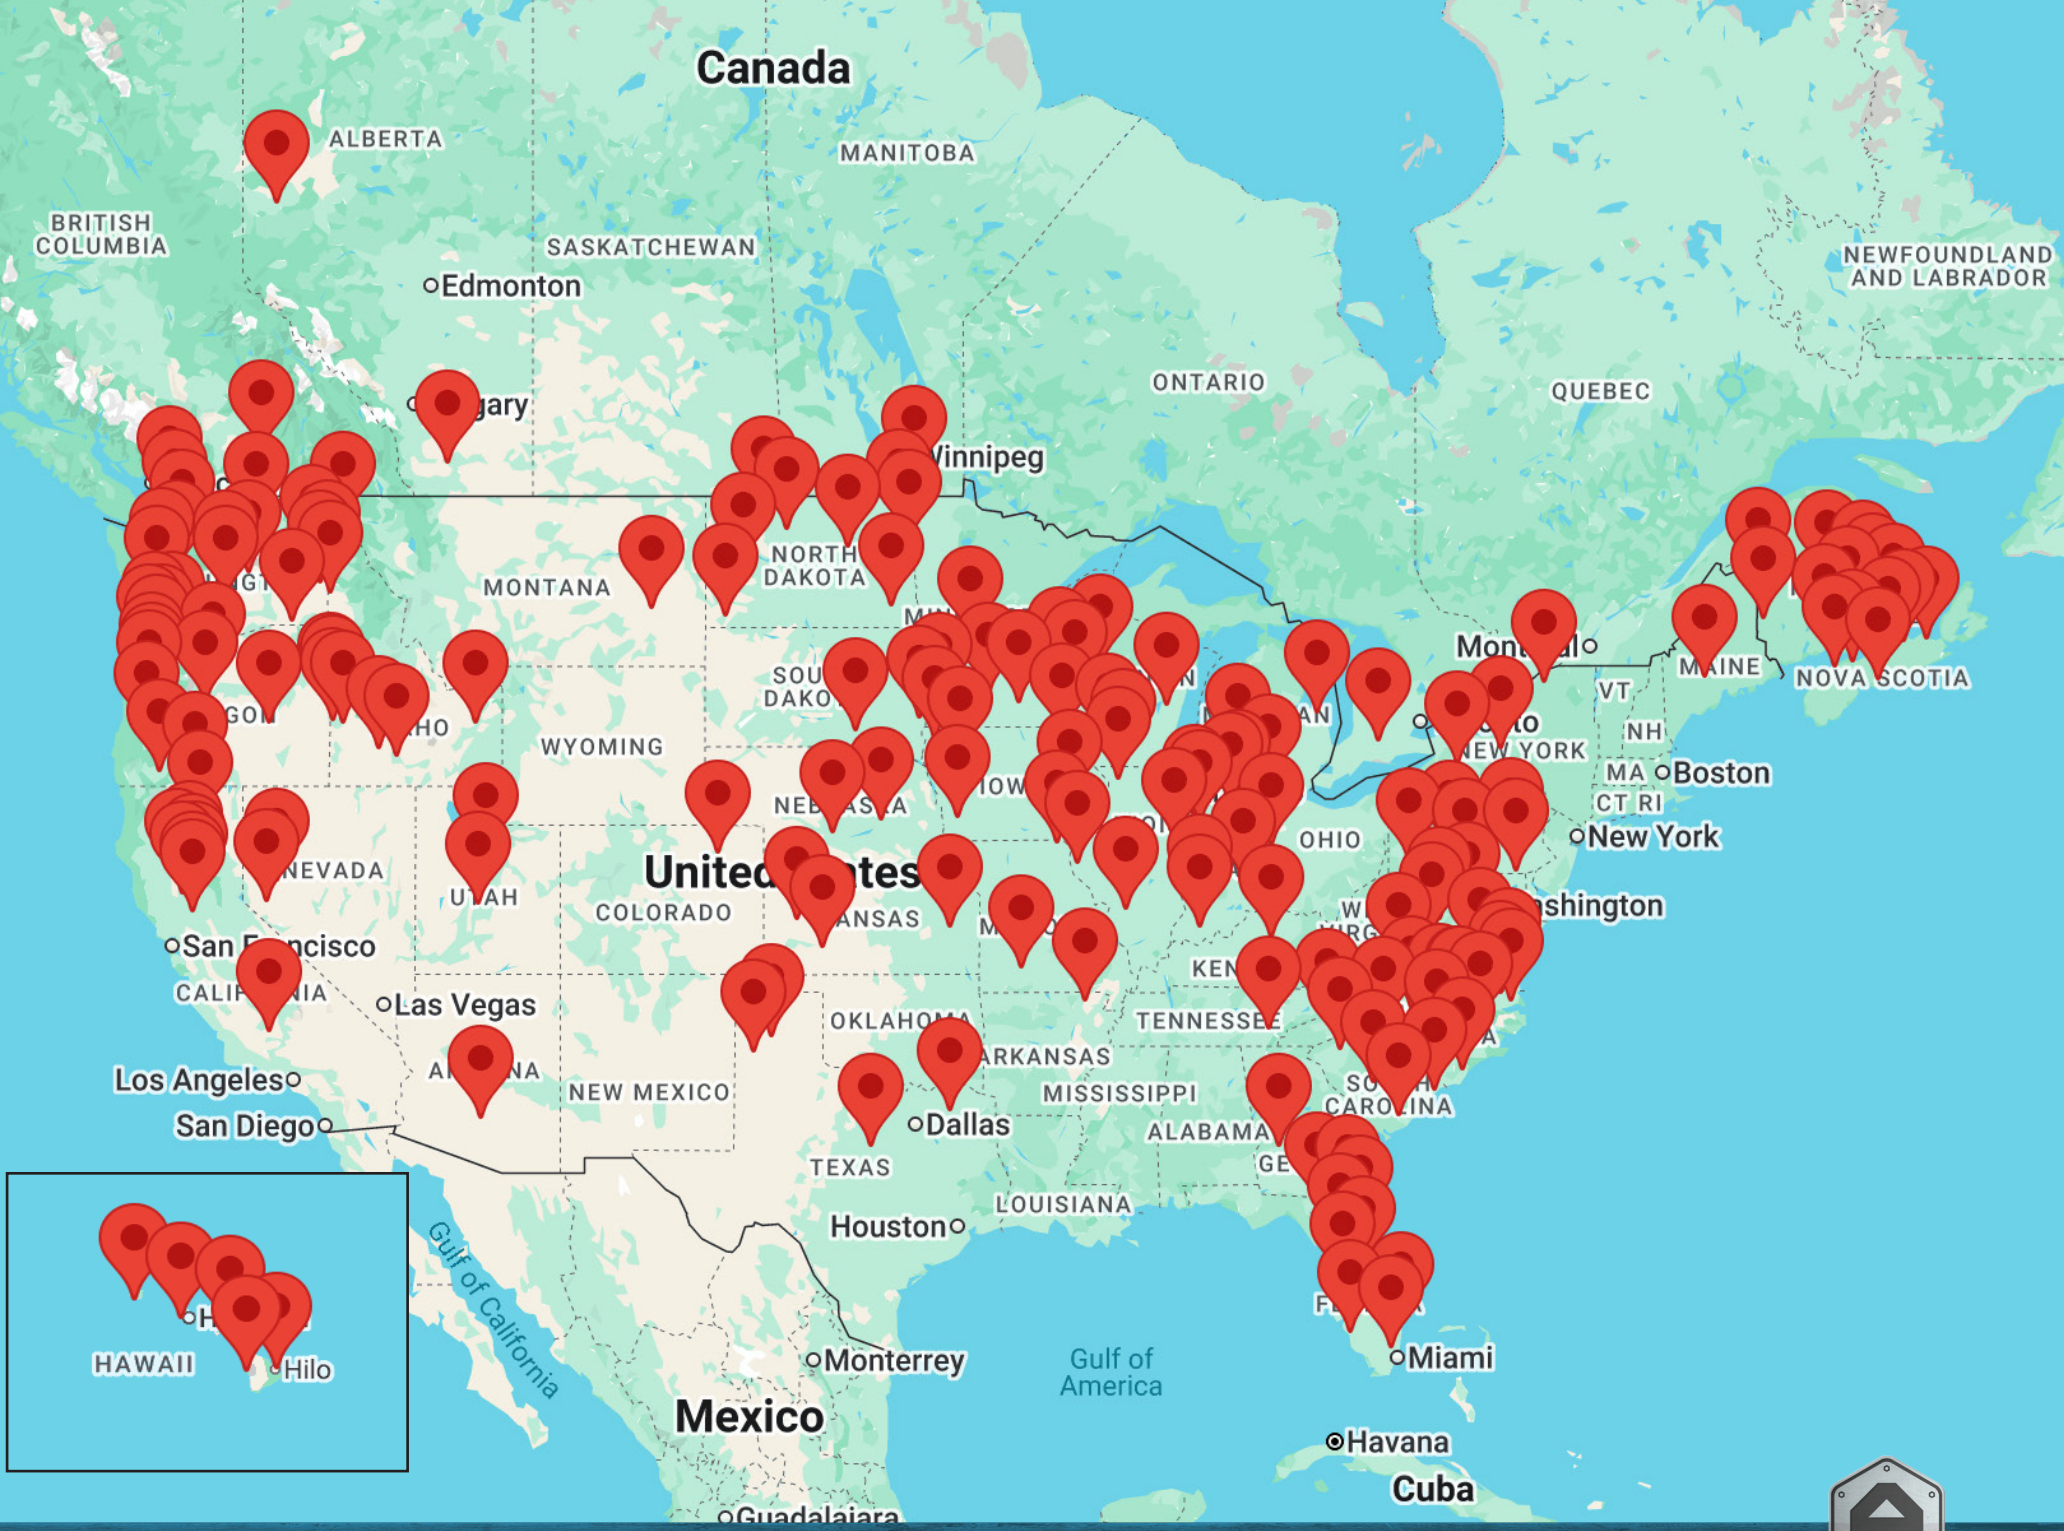

WE DON'T STOP UNTIL WE'RE PROUD!

IS IT A CALLING? ARE WE DESTINED TO BUILD THE TOUGHEST
SPREADERS IN THE WORLD? WE THINK SO, YES, AND THAT'S
WHY WE TAKE OUR WORK SO SERIOUSLY.

JUST LIKE THE FARMERS WE WORK FOR.

GIVE US A CALL. TAKE A PEEK AT OUR WEBSITE.
OR, BETTER YET, TALK TO SOMEONE WHO OWNS ONE.

SHAWN GUETTER - SALES SUPPORT MANAGER
SGUETTER@ARTEXMFG.COM | 507-430-5591

NICK KLABUNDE - SALES REPRESENTATIVE
NKLABUNDE@ARTEXMFG.COM | 507-637-7205

PROUDLY MANUFACTURED IN REDWOOD FALLS, MN
WWW.ARTEXMFG.COM | 888-644-2893



ARTEX
ALMOST AS TOUGH AS FARMING.

